



Larger with 2 pistons





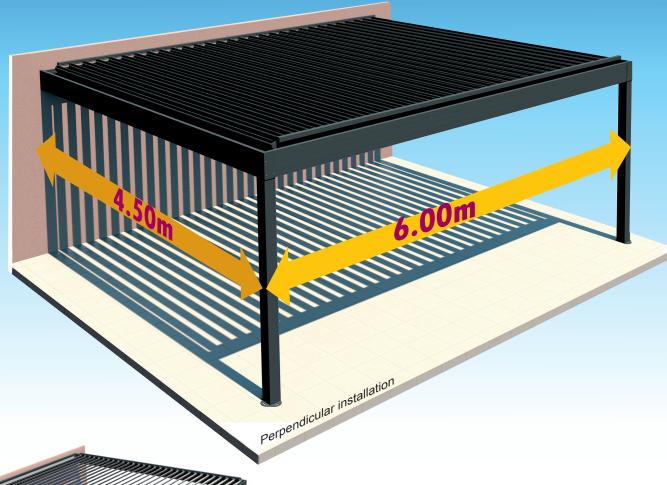




ADVANTAGES:




- Larger surface up to 27m2
- Adjustable sun intensity: partial or total, bioclimatic, slat opening at 1150
- Operation with double electric piston
- LED lightning option available





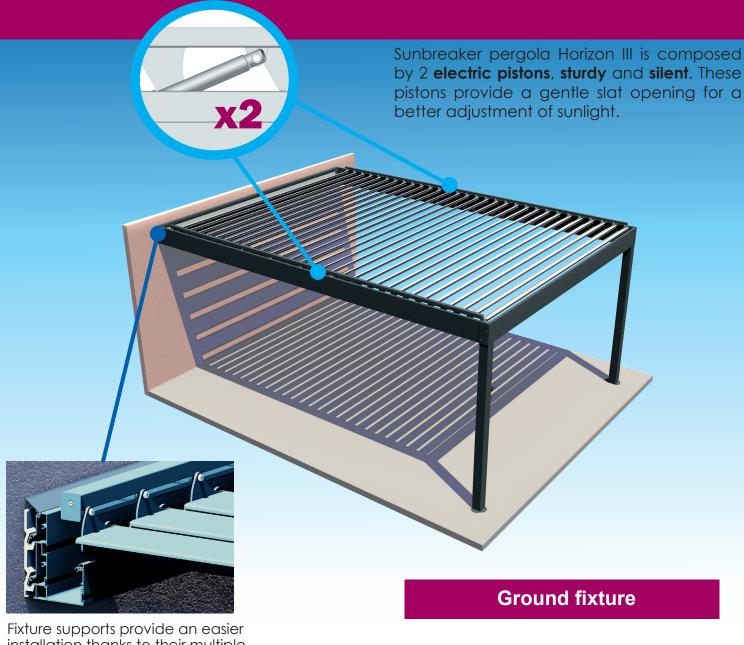

installation thanks to their multiple position possibilities.




Standard finishing



RAL 7016 ANTHRACITE GREY Textured Powder coat



RAL 9010 White **Shiny Powder coat**





Ground fixture support: **ST45**







Ground fixture support: **\$T4502**



Freestanding support




Ground fixture support: ST4510




ALL OPTIONS





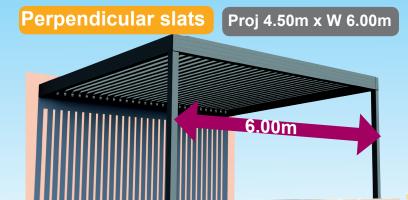



Accessories





Closure with screen awning

Vertical Sunbreaker



Closure with vertical sunbreaker

Automatisms and LED lightning



- LED string lightning on 3 sides
- Central remote control for all operations: slat opening and closure, LED lightning, or screen opening and closure
- Wind sensor and Rain sensor













